

General	
Shape	Square
Seating Capacity	6
Shell Material	Ultralife™ / Granitex™ / Geloy®
Dimensions	91 ½" x 91 ½" x 35" H / (232cm X 232 cm x 90 cm H)
Corner Radii	16 in. (41 cm)
Water Capacity	400 Gallons (1514 Liters)
Dry Weight	920 lbs (418 kg)
Shipping Weight	Domestic 920 lbs (418 kg) - Export 970 lbs (440 kg)
Full Weight	4260 lbs (1933 kg)
Skirt Material	Domestic Synthetic - Export Wood or Synthetic
Poly Floor	Yes

Water System	
Water Treatment System	Ultra Pure™
Plumbing Systems	4
Filters/Coverage	2 / 75 sq. ft.
Gate Valves	4
VCR Jet® - Air Adjustable/Directional	8
VCR Jet® - Rotator	12
VCR Jet® - Dual Rotator	0
VCR Jet® - Multi Port Spinner	0
VCR Jet® - Mini Rotator	10
VCR Jet® - Mini Directional	6
VCR Jet® - Euro Directional	0
VCR Jet® - Euro Rotator	0
VCR Jet® - Mini Directional in NFJ	12
Typhoon Jet	1
Ozone Jet	1
Heater Return Jet	1
Pump Returns	4
Diverter Valves	2
Floor Drains	1
Skimmer	8" Weir

Special Features	
Dynamic Massage Sequencer w/ control panel	Yes
NeckFlex® Jet Pillows	3
Headrest Pillows	0
Stereo system	Optional Wireless*
Water Feature	n/a
Water Feature Volume control	n/a
Cup Holders	3
Tactile Therapy	Foot & hand



Pump Information	Domestic (60Hz)	Export (50Hz)
Motor Size – Peak (Continuous) HP	4.0 (2.5) Hp	3.6 (2.0) HP
Jet Pumps # of Pumps/Speed	Two / Dual	Two / single
Circulation pump	1	1
Fountain pump	n/a	n/a
Electrical System	Domestic (60Hz)	Export (50Hz)
Voltage	240	240
Amperage	50/40/30	1X16 / 2X16 / 1X32
Heater	FastFlo 2.7,4.0,5.5 kW	FastFlo 2.9 kW
Thermostat	Electronic	Electronic
Light	1 with optional LED	Multi color LED
Control System	MSPA-MP-D12	MSPA-MP-D11-CE
Upper Control	Scrolling Message Center	Scrolling Message Center
Auxiliary Upper Control	Yes	Yes
Programmable	Yes	Yes



\* Wireless stereo not available for export

Note: 1. Subject to change without notice.

# 2006 Chairman II Architectural Specification

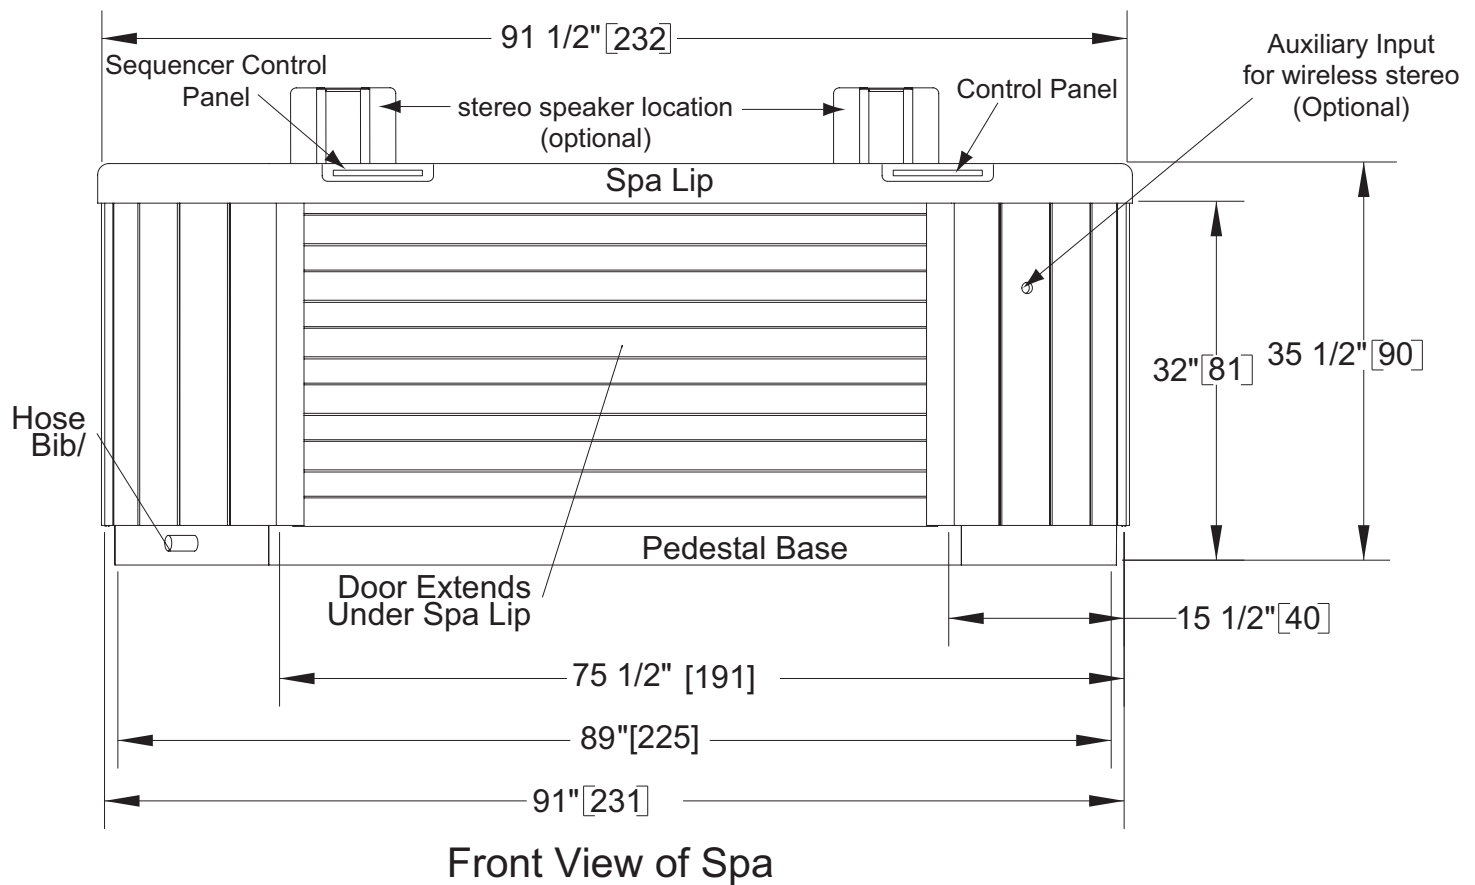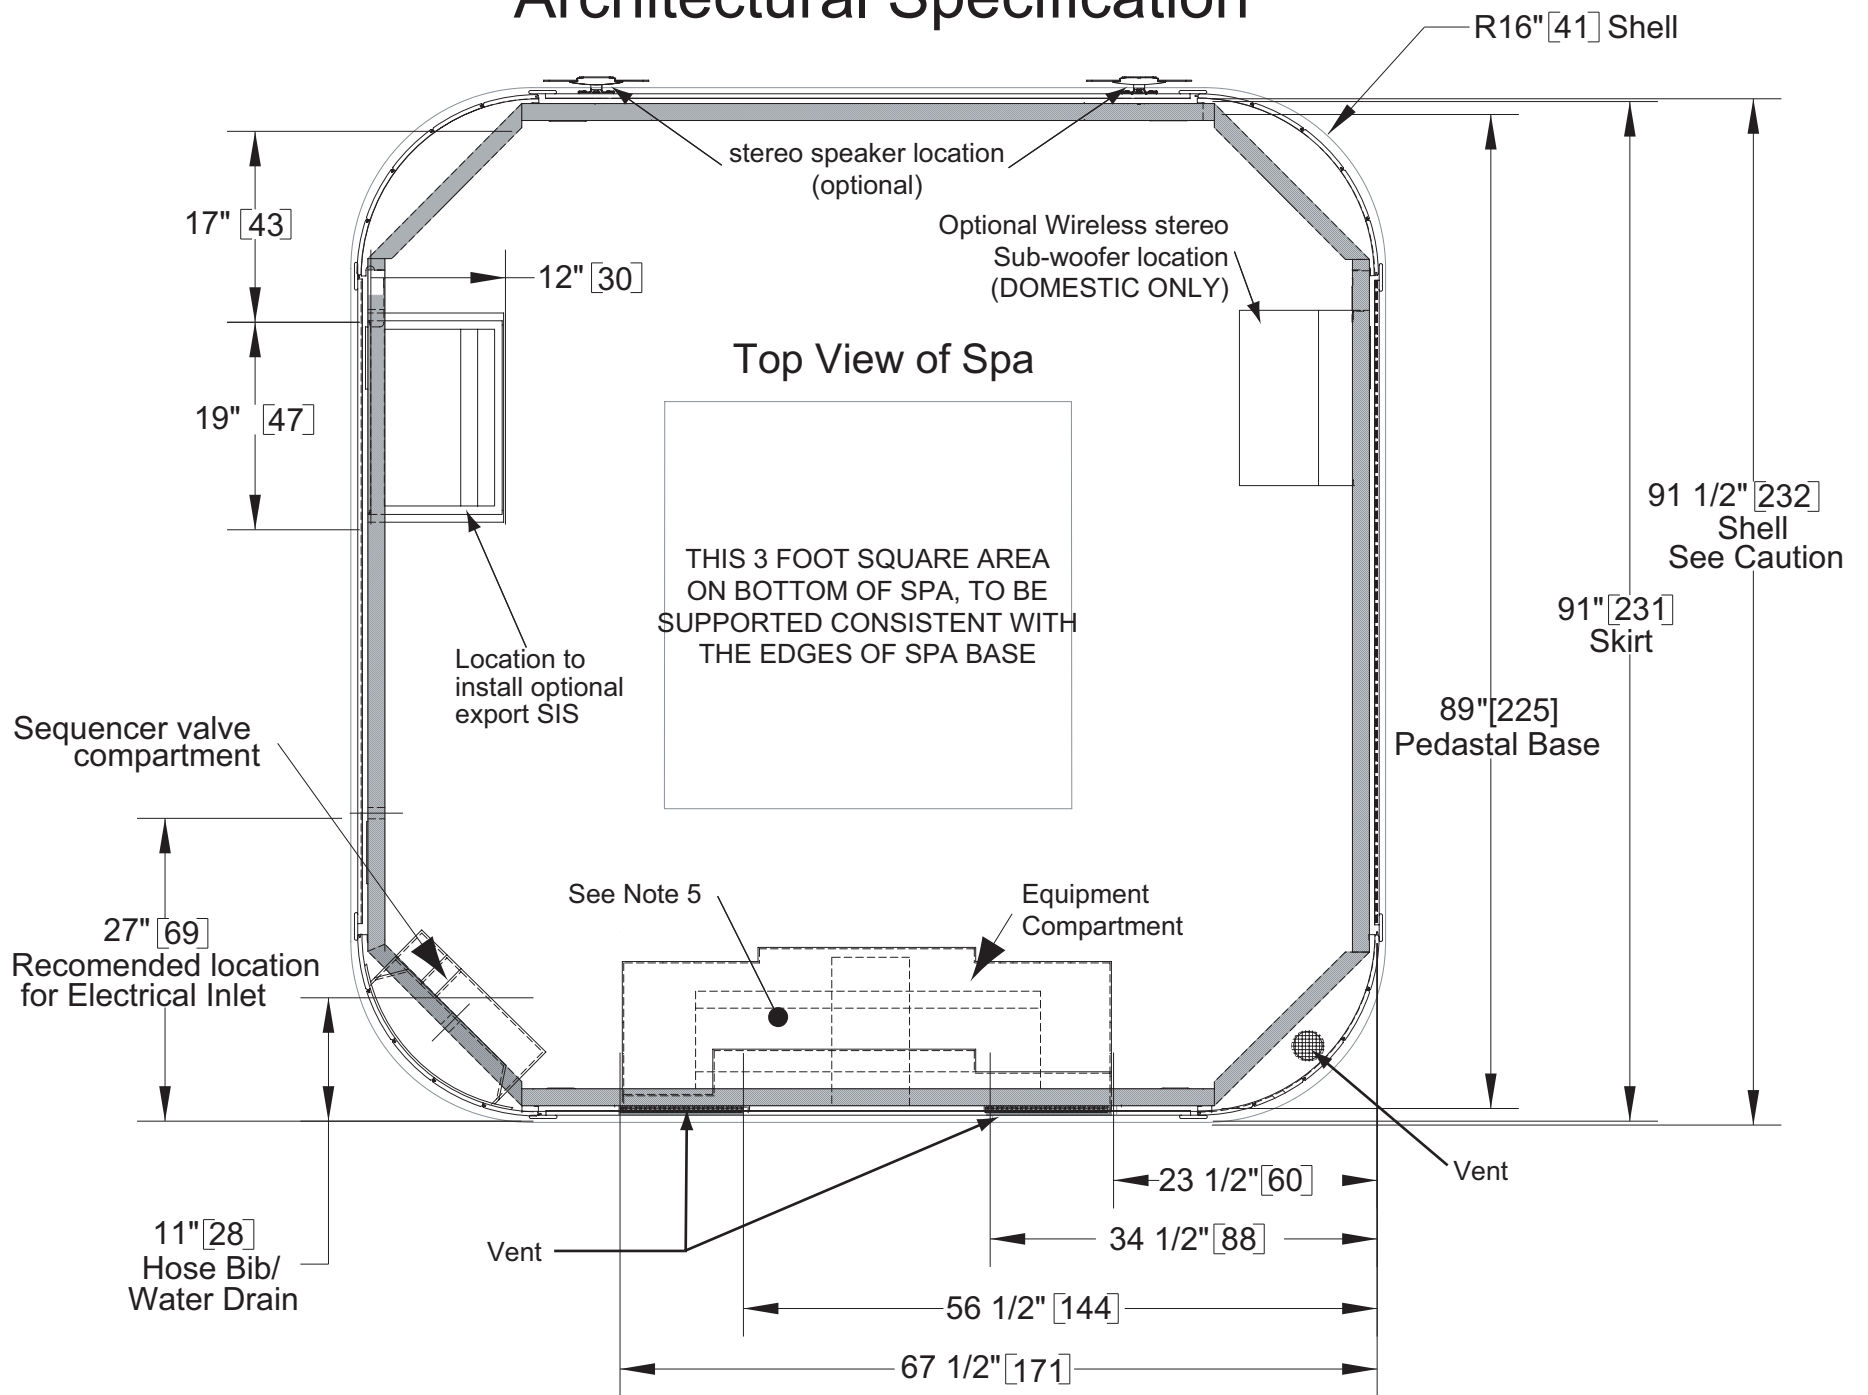

Note: 1. Subject to change without notice.

2. Engineering specs may differ slightly from brochure.
3. For E-Z lifter installation allow 18" clearances on the backside of the spa.
4. Alternative cabinets may add significant weight. Ask your dealer for exact details
5. This is the approximate location for drilling a hole if you must bring the power line in through the bottom of the spa. Be careful not to puncture a plumbing line inside the equipment compartment (drill from the inside compartment out).

Dimensions shown as inches and [centimeters] - XX" [ cm]

**Caution:**

Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. If site planning is critical to such tolerances, be sure to measure your actual spa.