


General	
Shape	Square
Seating Capacity	5
Shell Material	Ultralife™ / Granitex™ / Geloy®
Dimensions	91½" x 91½" x 35½" H / (232cm X 232cm x 90cm H)
Corner Radii	16" (41 cm)
Water Capacity	325 Gallons (1230 Liters)
Dry Weight	900 lbs (408 kg)
Shipping Weight	Domestic 900 lbs (408 kg) - Export 950 lbs (431 kg)
Full Weight	3610 lbs (1638 kg)
Skirt Material	Domestic Synthetic - Export Wood or Synthetic
Poly Floor	Yes
Water System	
Water Treatment System	Ultra Pure™
Plumbing Systems	4
Filters/Coverage	2 / 75 sq. ft.
Gate Valves	4
VCR Jet® - Air Adjustable/Directional	8
VCR Jet® - Rotator	12
VCR Jet® - Dual Rotator	0
VCR Jet® - Multi Port Spinner	0
VCR Jet® - Mini Rotator	4
VCR Jet® - Mini Directional	10
VCR Jet® - Euro Directional	0
VCR Jet® - Euro Rotator	0
VCR Jet® - Mini Directional in NFJ	8
Typhoon Jet	1
Ozone Jet	1
Heater Return Jet	1
Pump Returns	4
Diverter Valves	2
Floor Drains	1
Skimmer	8" Weir
Special Features	
Dynamic Massage Sequencer w/ control panel	No
NeckFlex® Jet Pillows	2
Headrest Pillows	1
Stereo system	Optional Wireless*
Water Feature	n/a
Water Feature Volume control	n/a
Cup Holders	2
Tactile Therapy	Foot & hand
Pump Information	
Motor Size – Peak (Continuous) HP	Domestic (60Hz) Export (50Hz)
	4.0 (2.5) Hp 3.6 (2.0) HP
Jet Pumps # of Pumps/Speed	Two / Dual Two / single
Circulation pump	1 1
Fountain pump	n/a n/a
Electrical System	
Voltage	Domestic (60Hz) Export (50Hz)
	240 240
Amperage	50/40/30 1X16 / 2X16 / 1X32
Heater	FastFlo 2.7,4.0,5.5 kW FastFlo 2.9 kW
Thermostat	Electronic Electronic
Light	1 with optional LED Multi color LED
Control System	MSPA-MP-D12 MSPA-MP-D11-CE
Upper Control	Scrolling Message Center Scrolling Message Center
Auxiliary Upper Control	Yes Yes
Programmable	Yes Yes



* Wireless stereo not available for export

Note: 1. Subject to change without notice.

2006 Diplomat Architectural Specification

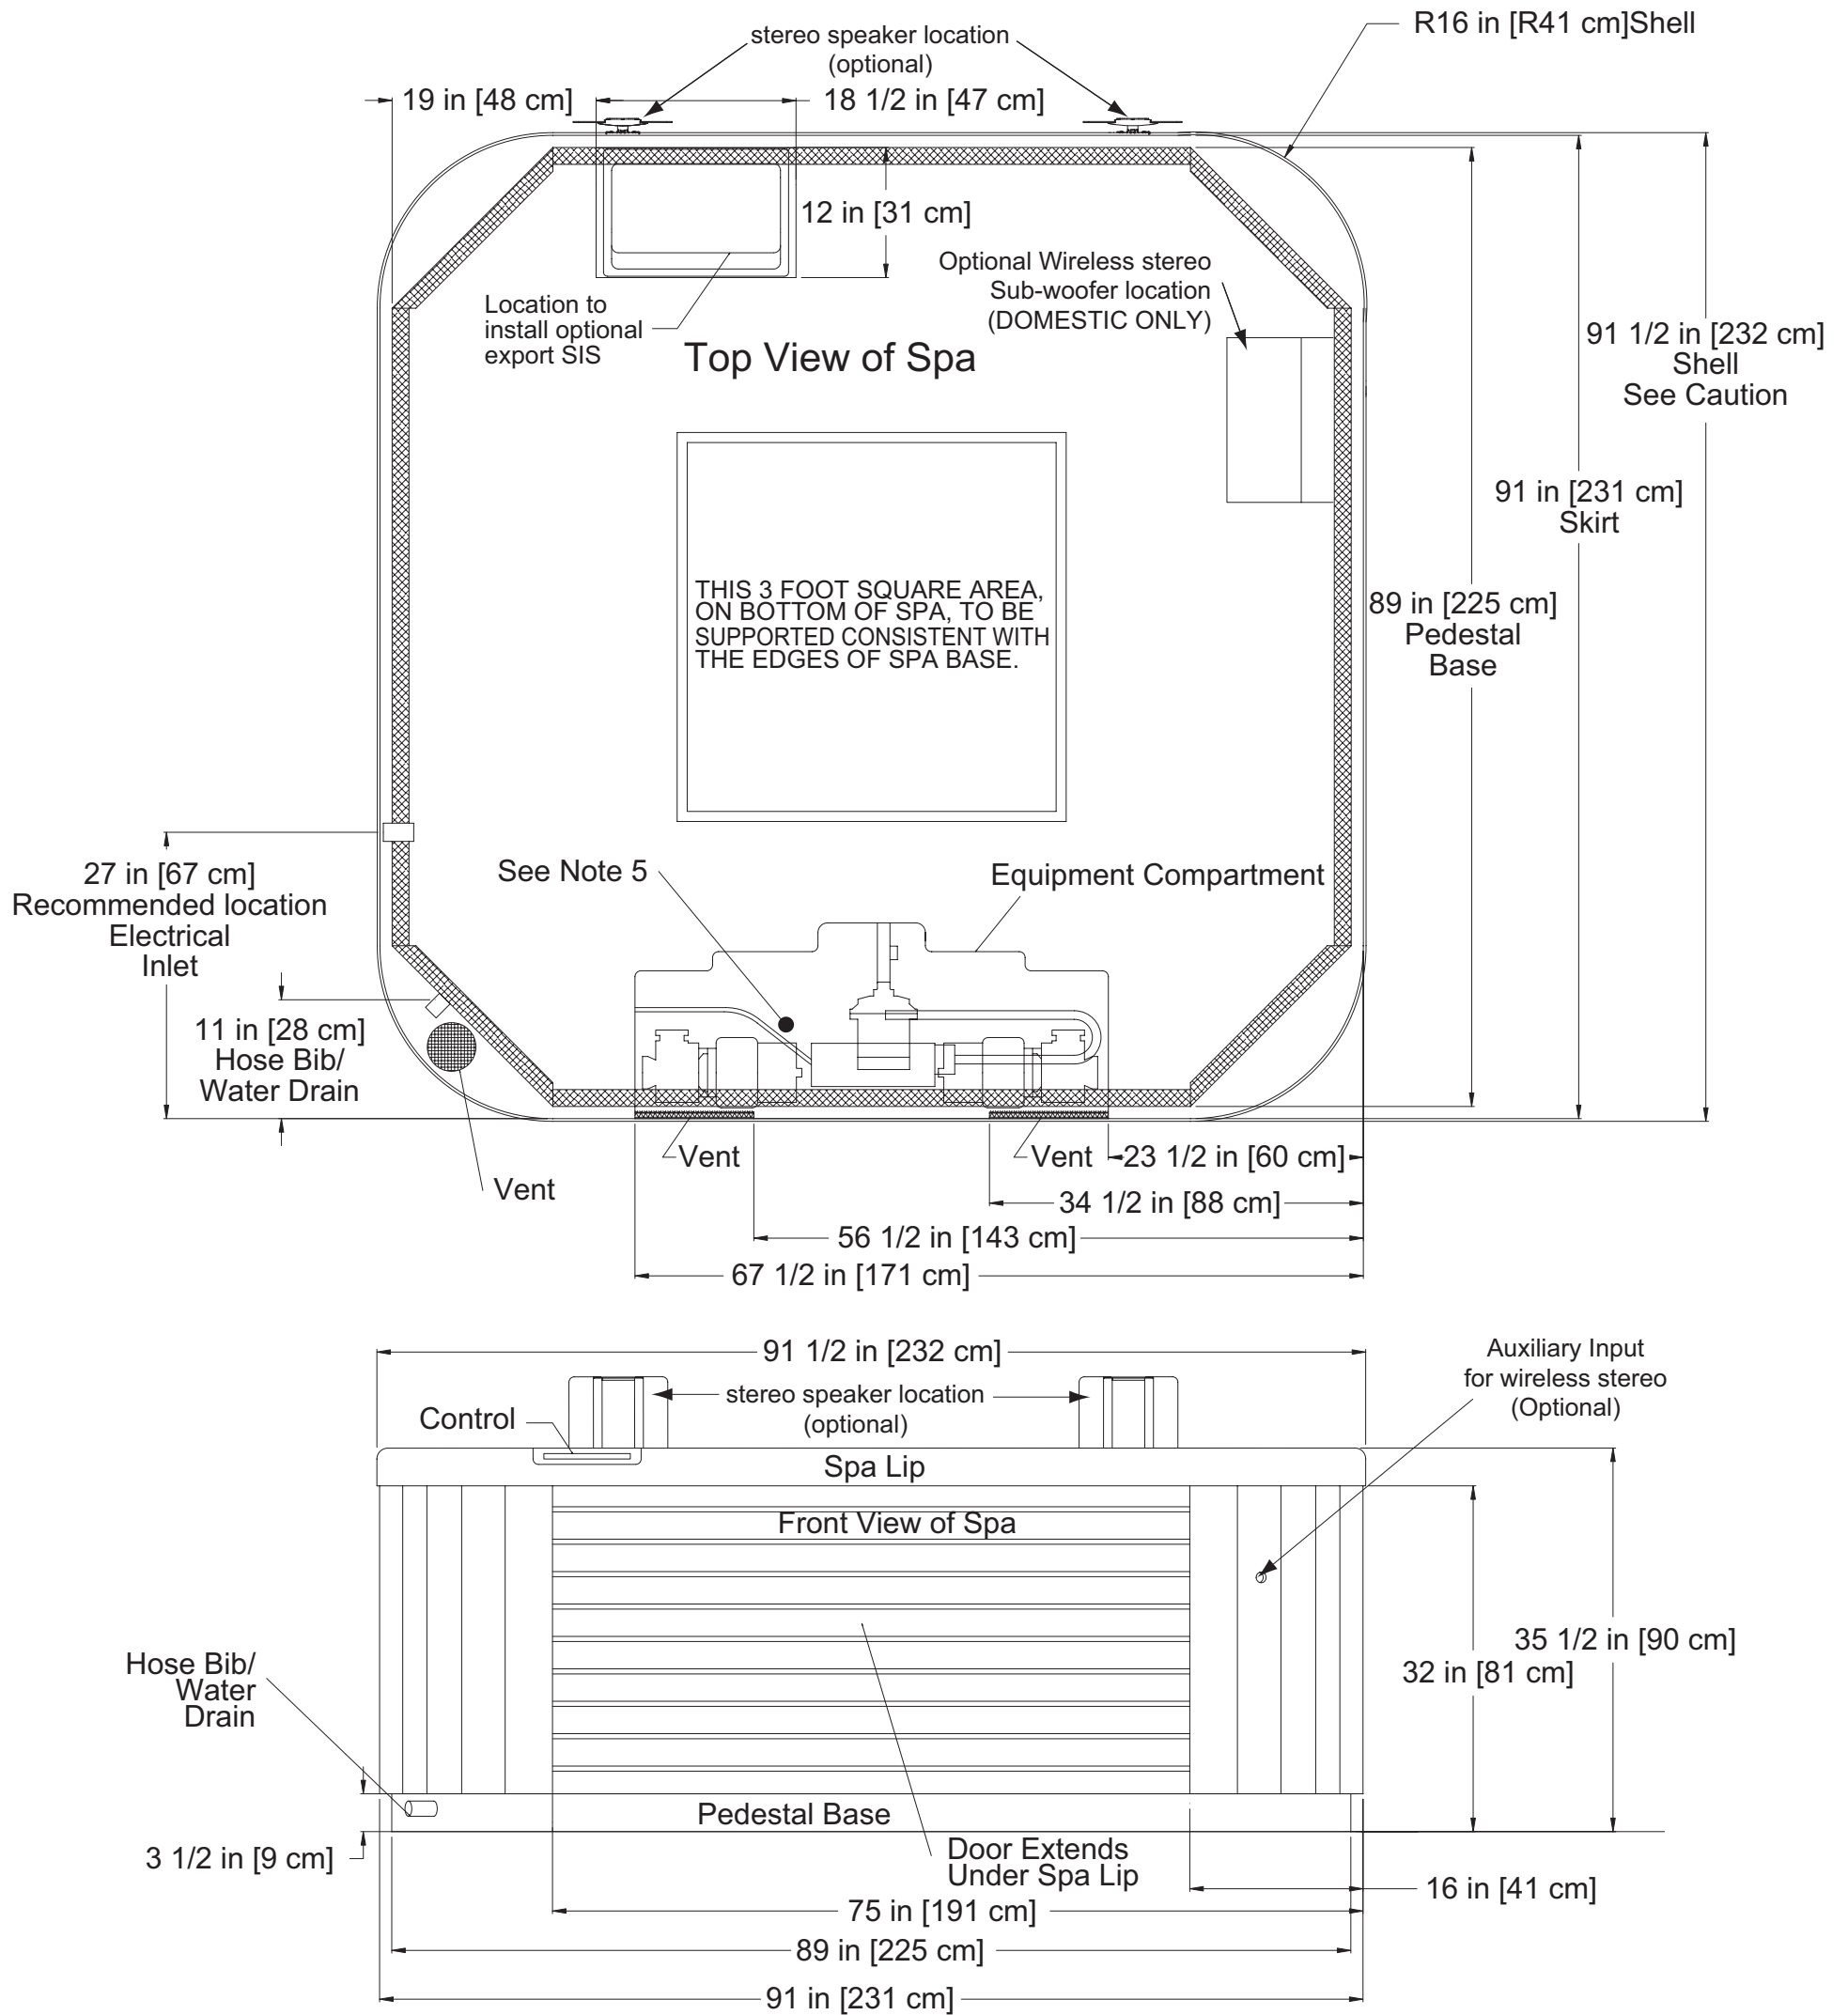

Note: 1. Subject to change without notice.

2. Engineering specs may differ slightly from brochure.

3. For E-Z lifter installation allow 18" (45.7cm) clearances on the backside of the spa.

4. Alternative cabinets may add significant weight. Ask your dealer for exact details

5. This is the approximate location for drilling a hole if you must bring the power line in through the bottom of the spa. Be careful not to puncture a plumbing line inside the equipment compartment(drill from the inside compartment out).

Caution:

Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above.

If site planning is critical to such tolerances, be sure to measure your actual spa.